

# JVC

4K PTZ Remote Camera (NDI|HX)

## KY-PZ400NW/NB

HD PTZ Remote Camera (NDI|HX)

## KY-PZ200NW/NB

HD PTZ Remote Camera

## KY-PZ200W/B

4K

H.265/  
HEVC

SRT  
SECURE  
RELIABLE  
TRANSPORT



KY-PZ400N

A New Line of IP-Controlled PTZ Cameras provide Optimal Quality in Streaming and Remote Production over the Internet



KY-PZ200N/KY-PZ200

## 4K 1/2.5-inch CMOS Image Sensor

The KY-PZ400N is equipped with a 4K 1/2.5" CMOS image sensor with 8.51M effective pixels. The KY-PZ200N/PZ200 is equipped with an HD 1/2.8" CMOS image sensor with 2.07M effective pixels.



**Powerful Optical Zoom: 12x** KY-PZ400N **20x** KY-PZ200N/PZ200  
**Wide Horizontal Angle of View: 71°** KY-PZ400N



A performer's technique can be captured clearly, even in a large hall.



**KY-PZ400N**  
**Optical Zoom 12x**  
 f= 4.4mm – 52.8mm  
 Approx. 26.4mm – 316.8mm  
 (35mm equivalent)  
 Digital zoom: 16x



**KY-PZ200N/PZ200**  
**Optical Zoom 20x**  
 f= 4.4mm – 88.5mm  
 Approx. 30.2mm – 606.9mm  
 (35mm equivalent)  
 Digital zoom: 16x

## Remote Control of Multiple Cameras with RM-LP100 (optional)



By using the JVC RM-LP100 Remote Camera Controller, you can operate up to a hundred KY-PZ400/PZ200 Series cameras over the Internet. A variety of camera functions including PTZ, focus, iris, and menu settings can be controlled. PTZ Remote control capabilities are also made possible through the JVC KM-IP6000/IP4000 Live IP Production Suites or a variety of other options from vMix, OBS Studio and NewTek.

## Quality Streaming with NDI and SRT

For reliable, stable streaming, all models feature various QoS capabilities.

NDI|HX\* is a high quality, low latency IP video transmission standard pioneered by NewTek.

\* NDI is a trademark or registered trademark of Vizrt Group in the United States and other countries.




SRT advanced streaming uses automatic repeat request (ARQ) and forward error correction (FEC) to prevent packet loss typical for internet connections. SRT also offers stream encryption for content protection.



## On-Site IP Studio System

Installing KY-PZ400N cameras in the studio enables programs to be produced by a small number of people.

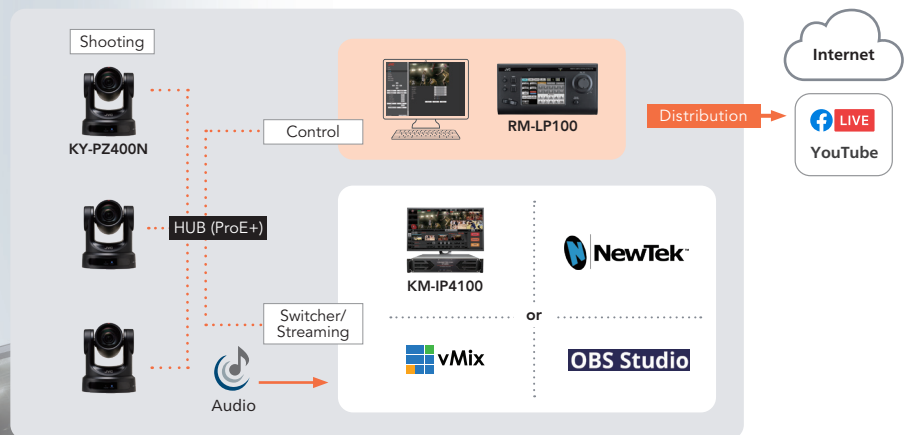

Item		Model	Description	Qty
1	Shooting	KY-PZ400N	4K PTZ Remote Camera	3
2	Control	PC for KY-PZ400N		1
3		RM-LP100	Remote Camera Controller	1
4	Switcher/Streaming	KM-IP6000/IP4000 Series	LIVE STREAMING PRODUCTION SUITE	
5		vMix		
6		OBS Studio		
7	Audio System	Newtek		
8				



## H.264/H.265/Motion JPEG and Dual Streaming

In addition to H.264, a video codec widely used in PCs, smartphones, or tablets, H.265 is also supported. Moreover, the dual streaming capability enables workflows such as editing videos with low load using low-resolution substreams and simultaneously generating edited videos with high-resolution mainstreams.

### 2-Color Tally Useful for Studio Shooting


KY-PZ400N



A tally LED is available on top of the lens mount. It lights in either red or green depending on the mode, allowing you to easily check the program status or standby mode even while camera is panning.

### UVC (USB Video Class) Support for Webcam Usage

KY-PZ200N/PZ200

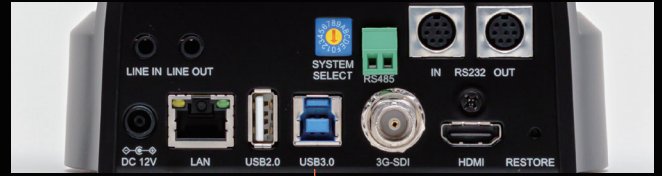


USB 3.0 with UVC Support

Photo shows KY-PZ200N/PZ200.

Using an optional USB cable, you can connect the KY-PZ200N/PZ200 directly to a PC and use it as a webcam. This allows for web conferencing and remote lectures with high quality, high magnification images.


## Multi-Camera Synchronization with VITC and NTP

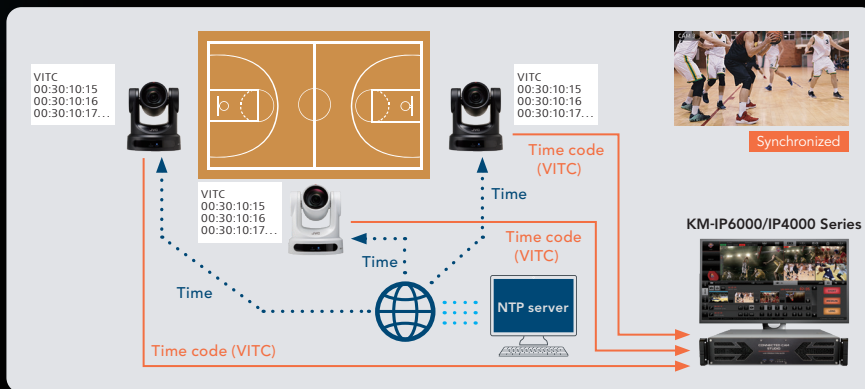

Multi-camera synchronization for live event productions is simply achieved with VITC (Vertical Interval Time Code) and NTP (Network Time Protocol). This feature is ideal for the mixing and streaming of concerts, shows and sporting events where image synchronization is critical.


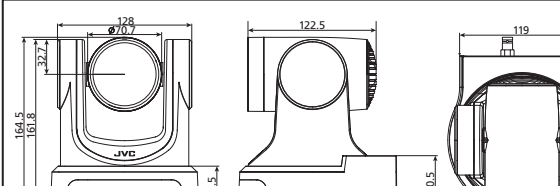
## REMI (Remote Production over the Internet)

With the KY-PZ400N series, you can take full advantage of the Internet for your live remote productions. Just bring your camera operators on location—no massive external devices requiring teams of people to operate are necessary. Connect via LAN to transmit broadcast quality video to a remote studio anywhere on the Internet.

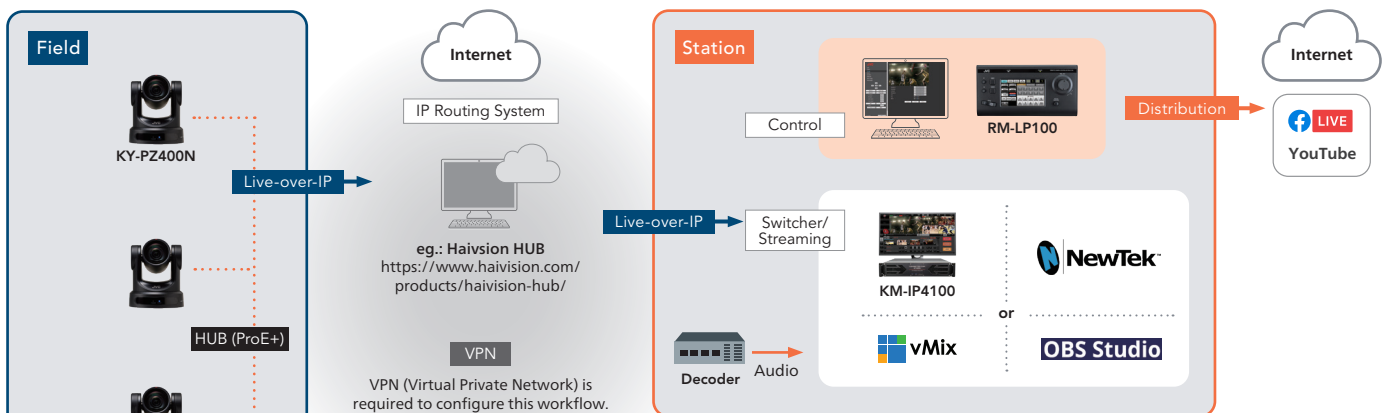

Item		Model	Description	Qty
1	Shooting	KY-PZ400N	4K PTZ Remote Camera	3
2	Control	PC for KY-PZ400N		1
3		RM-LP100	Remote Camera Controller	1
4	Switcher/Streaming	KM-IP6000/IP4000 Series	LIVE STREAMING PRODUCTION SUITE	
5		vMix		
6		OBS Studio		
7		Newtek		
8	Audio System	Audio Encoder/Audio Decoder		

## Specifications

		KY-PZ400N	KY-PZ200N	KY-PZ200
CAMERA	Sensor	1/2.5-inch Progressive CMOS, effective pixels: 8.51M	1/2.8-inch Progressive CMOS, effective pixels: 2.07M	
	Lens	Optical Zoom 12x, f=4.4mm to 52.8mm, F1.8 to F2.6 35mm equivalent (approx.): 26.4mm to 316.8mm	Optical Zoom 20x, f=4.4mm to 88.5mm, F1.8 to F2.8 35mm equivalent (approx.): 30.2mm to 606.9mm	
	Digital Zoom	16x		
	Minimal Illumination	0.5lx @ F1.8, AGC ON		
	Gain	0, 3, 6, 9, 12, 15, 18, 21, 24, 27, 30, 33, 36, 42, 45, 48dB		
	Shutter	1/30s to 1/10000s		
	White Balance	Auto, Indoor, Outdoor, One push, Manual		
	Digital Noise Reduction	3DNR (Digital Noise Reduction) (OFF, 1 to 8, AUTO)		
	Horizontal Angle of View	71° to 8.2°	60.7° to 3.36°	
	Vertical Angle of View	42.7° to 4.5°	34.1° to 1.89°	
	Horizontal Rotation Range	±170°		
	Vertical Rotation Range	-30° to +90°		
	Pan Speed Range	1.7° to 100°/s		
	Tilt Speed Range	1.7° to 69.9°/s		
Image	H/V flip, Image freeze, H/V auto inverting function			
Preset	Number of preset: 255, Preset accuracy: 0.1°			
NETWORK	Video Compression	H.265/H.264/MJPEG		
	Video Stream	Main Stream, Sub Stream		
	Main Stream	3840x2160: 30p, 29.97p, 25p Resolution: 1920x1080, 1280x720, 1024x576, 720x480, 720x408, 640x480, 640x360 Frame Rate: 60p, 59.94p, 50p, 30p, 29.97p, 25p	Resolution: 1920x1080, 1280x720, 1024x576, 720x480, 720x408, 640x480, 640x360 Frame Rate: 60p, 59.94p, 50p, 30p, 29.97p, 25p	
	Sub Stream	Resolution: 720x480, 720x408, 640x480, 640x360, 480x320, 320x240 Frame Rate: 60p, 59.94p, 50p, 30p, 29.97p, 25p		
	Audio	Audio compression: AAC, Audio bit rate: 96K, 128K		
	Supporting Protocols	Control: NDI HX, Standard, Pelco Streaming: RTSP/RTP, RTMP/RTMPS, SRT, NDI HX	Control: NDI HX, Standard, Pelco Streaming: RTSP/RTP, RTMP/RTMPS, SRT, NDI HX	Control: Standard, Pelco Streaming: RTSP/RTP, RTMP/RTMPS, SRT
	SRT Mode	Listener, Caller, Rendezvous (Future update)		
INPUT/OUTPUT INTERFACES	HDMI Output Terminal	HDMI: Type A Video format: 3840x2160: 30p/29.97p/25p 1920x1080: 60p/59.94p/50p/30p/29.97p/25p 1920x1080: 60i/59.94i/50i 1280x720: 60p/59.94p/50p	HDMI: Type A Video format: 1920x1080: 60p/59.94p/50p/30p/29.97p/25p 1920x1080: 60i/59.94i/50i 1280x720: 60p/59.94p/50p	
	3G-SDI Output Terminal	BNC type 720p/1080i/1080p: Embedded audio 3G-SDI: SMPTE ST424 compliant, HD-SDI: SMPTE ST292 compliant Video format: 1920x1080: 60p/59.94p/50p/30p/29.97p/25p 1920x1080: 60i/59.94i/50i 1280x720: 60p/59.94p/50p		
	Network Interface (LAN)	RJ45: 10BASE-T/100BASE-TX/1000BASE-T		
	Audio Interface	Line In/Out: Ø3.5mm audio interface		
	USB	USB2.0, A type (for maintenance)	USB2.0, A type (for maintenance) USB3.0, B type (for UVC)	
	Communication Interface	RS232 IN: 8-pin mini DIN, Protocols: Standard/Pelco-D/Pelco-P		
		RS232 OUT: 8-pin mini DIN, Protocols: Use only Standard protocol		
RS485: 2-pin Phoenix port Protocols: Standard/Pelco-D/Pelco-P				
GENERAL SPECIFICATIONS	LED	Tally: Red/Green x 1	—	
	Input Voltage	Power: Blue x 1, Standby: Yellow-green x 1 DC 12V (AC Adapter), DC 37 to 57V (PoE)		
	PoE Supply	802.3af standard		
	Current consumption	Approx. 0.62A (AC Adapter) Approx. 0.18A (PoE)	Approx. 0.65A (AC Adapter) Approx. 0.19A (PoE)	
	Temperature	Operation: 0°C to 40°C, Storage: -20°C to 50°C		
	Humidity	Operation: 30% to 80%, Storage: Under 85%		
	Dimensions (W x H x D)	142mm x 165mm x 169mm		
	Net Weight	Approx. 1.7kg	Approx. 1.5kg	
	Menu Language	English, Chinese, Japanese, German, Spanish, Russian, French, Italian		
	Accessories	 <ul style="list-style-type: none"> <li>1) AC Power Adapter</li> <li>2) Power cable x 1 (Type A for U model), x 2 (Type C/BF for E model)</li> <li>3) RS232 cable</li> <li>4) IR remote control</li> <li>5) User manual</li> <li>6) Ceiling bracket</li> <li>7) Logo sticker x 2</li> </ul>		

NDI is a trademark or registered trademark of Vizrt Group in the United States and other countries. Product and company names mentioned here are trademarks or registered trademarks of their respective owners. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. QR Code is a registered trademark of Denso Wave Incorporated.

Simulated pictures. Values for weight and dimensions are approximate. E.&O.E. Design and specifications subject to change without notice. Copyright © 2021, JVCKENWOOD Corporation. All Rights Reserved.

DISTRIBUTED BY

For Instruction Manual

JVC Professional Video website



[http://www32.jvckenwood.com/jvc/manual\\_e/index.asp](http://www32.jvckenwood.com/jvc/manual_e/index.asp)



USA  
[pro.jvc.com](http://pro.jvc.com)



Europe  
[eu.jvc.com/pro](http://eu.jvc.com/pro)

JVCKENWOOD Corporation

KCS-8911

\*JVC\* is the trademark or registered trademark of JVCKENWOOD Corporation.